

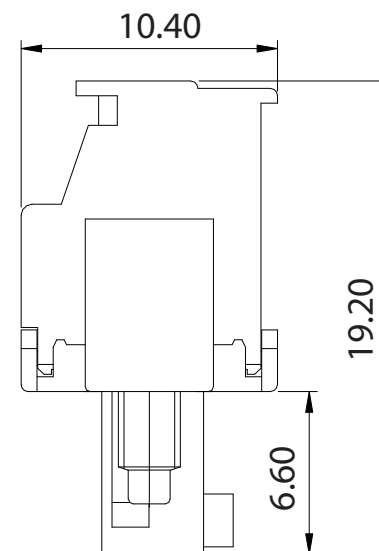


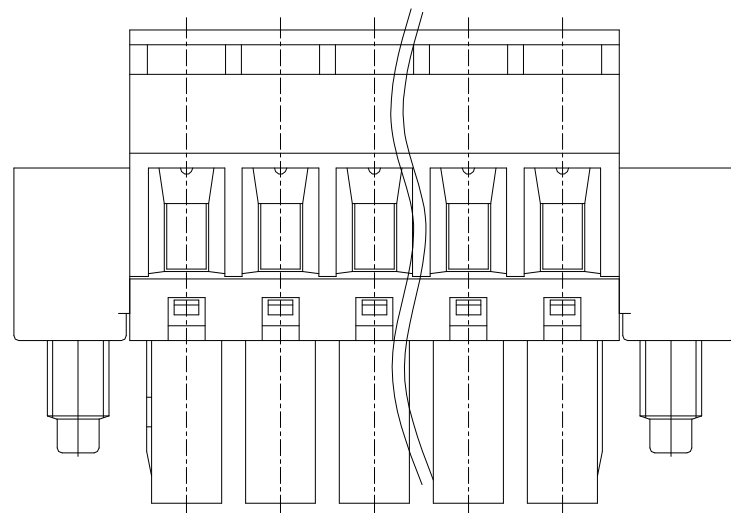

Approvals

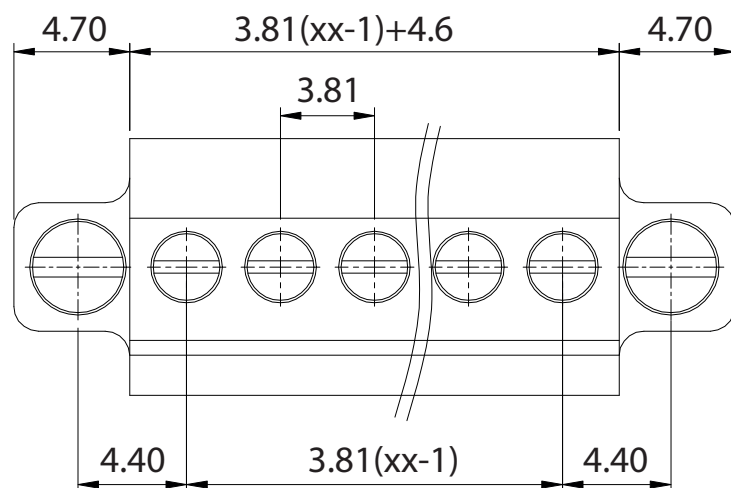

8A-300V
not approved

Electrical

Rated voltage 250V
Rated current 7A
Contact resistance 20mΩ
Insulation resistance 500MΩ/DC500V
Withstanding voltage AC1600V/1min
Wire range 28-16 AWG 1,5mm²

Torque 0,2Nm (1.8Lb in)
Temp. Range -40°C +105°C
Stripping lenght 7 mm
Max sold. time

Dimensions

Pitch 3,81 mm
Poles 2÷22

Material

Housing PA66 UL94V0
Pin
Cage Copper Alloy, Ni plated
Screws M2 steel, Zn plated
Side Block
Nut screw
Clamp Copper Alloy, Ni plated

General description of ordering code

Series	n. Poles	Pitch	Version	Color	Custom
CRV	02÷22	-3.81	-LF		

Version Date

01/21 09/11/2021



euro-block



linear dimension (Tolerances Standard GB/T 14486-2008)

variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

UNITS: mm

SCALE: 10:1

SHEET SIZE: ISO A4



First angle projection

CRV-3.81-LF