

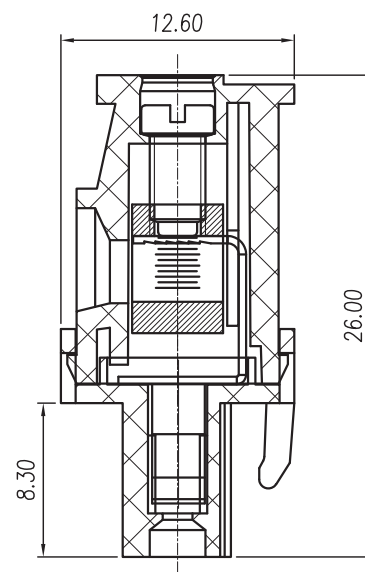



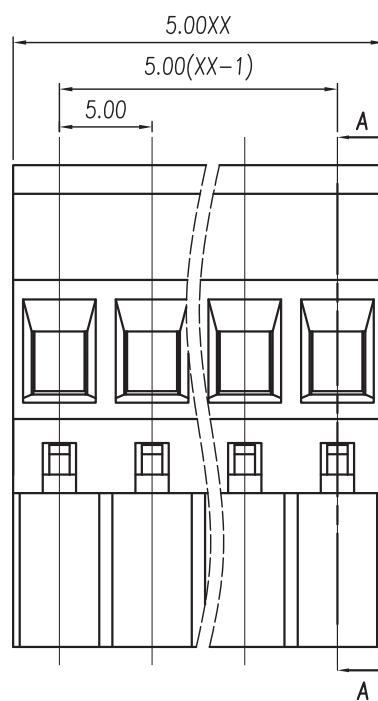

SECTION:A-A

Approvals

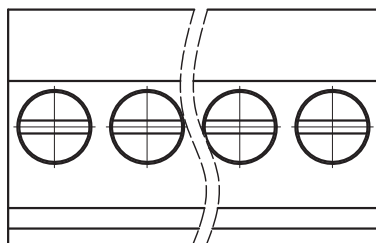

15A-300V



not approved

Electrical

Rated voltage	320V
Rated current	20A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1 min
Wire range	28-14 AWG 2,5 mm ²

Torque	0,5Nm(4.5 Lb in)
Temp. Range	-40°C + 105°C
Stripping lenght	7 mm
Max sold. time	

Dimensions

Pitch	5 mm
Poles	2÷24

Material

Housing	PA66 UL94V0
Pin	
Cage	Copper Alloy, Ni plated
Screws	M3 Steel, Zn plated
Side Block	
Nut screw	
Clamp	Phosphore Bronze, Ni plated

General description of ordering code

Series	n. Poles	Pitch	Version	Color	Custom
CRV	02÷24	-5	-L		

Version Date

17/01	25/10/17
-------	----------



euro-block



UNITS: mm

SHEET SIZE: ISO A4

SCALE: 10:1

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

CRV-5-L