




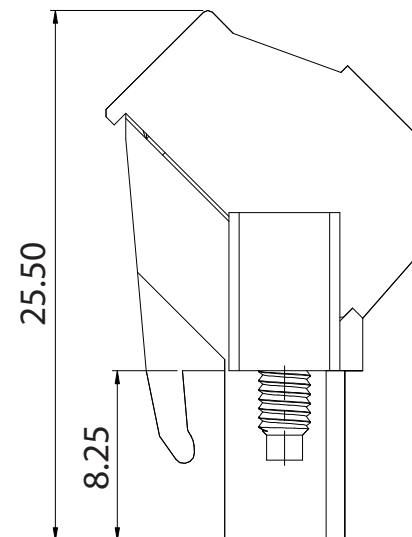

Approvals

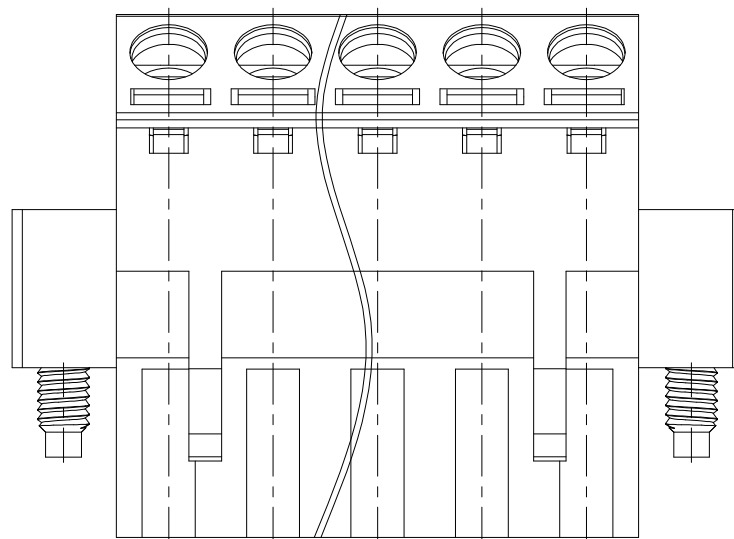

10A-300V

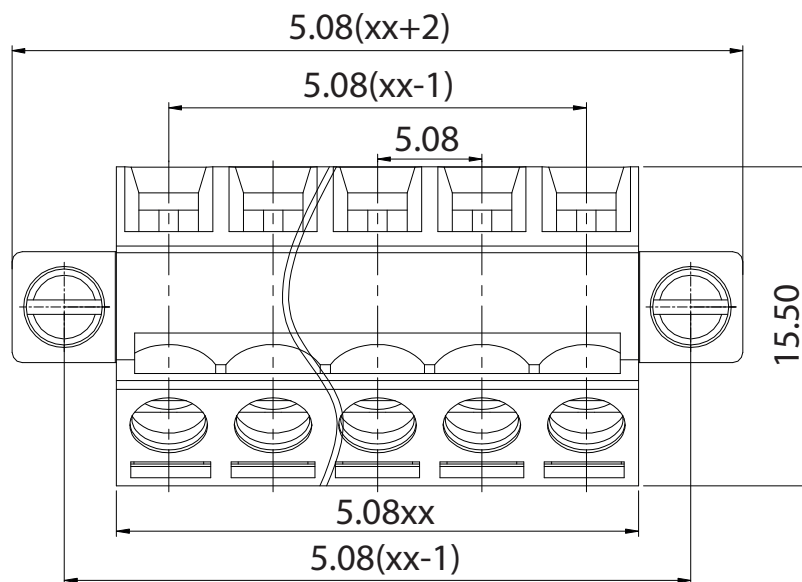

Electrical

Rated voltage	450 V
Rated current	20 A
Contact resistance	20 mΩ
Insulation resistance	500 MΩ/DC500V
Withstanding voltage	AC1600V/1 min
Wire range	2,5mm ² 28÷14 AWG

Torque	0,5Nm (4.5Lb in)
Temp. Range	-40°C + 105°C
Stripping length	7 mm
Max sold. time	

Dimensions

Pitch	5,08 mm
Poles	2÷22

Material

Housing	PA66 UL94V0
Pin	
Cage	Copper Alloy, Ni plated
Screws	M3 steel, Zn plated
Side Block	
Nut screw	
Clamp	

General description of ordering code

Series	n. Poles	Pitch	Version	Color	Custom
CRI	2÷22	-5.08	-F		

Version	Date
01/21	09/11/2021



euro-block



UNITS: mm

SHEET SIZE: ISO A4

SCALE: 2:1

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

CRI-5.08-F