

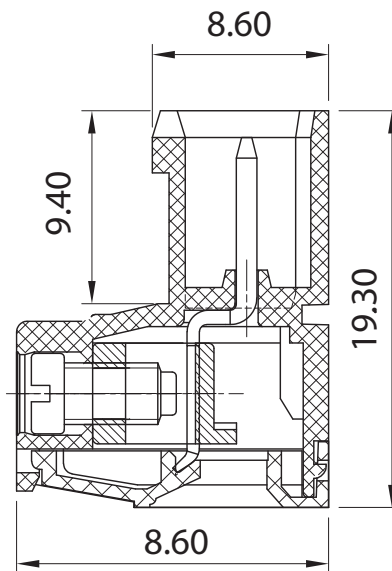


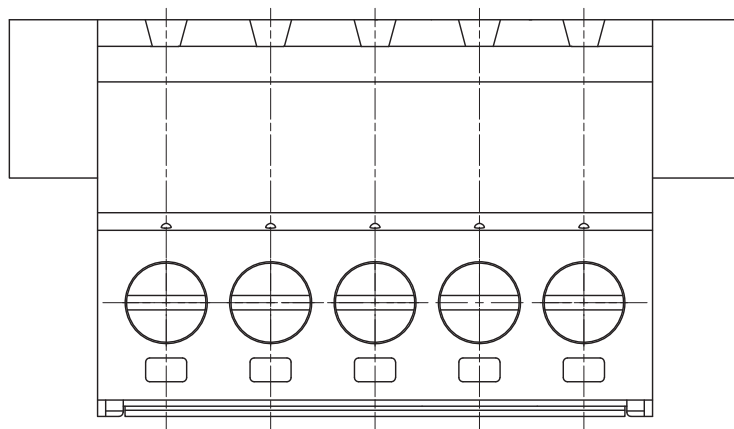

Approvals

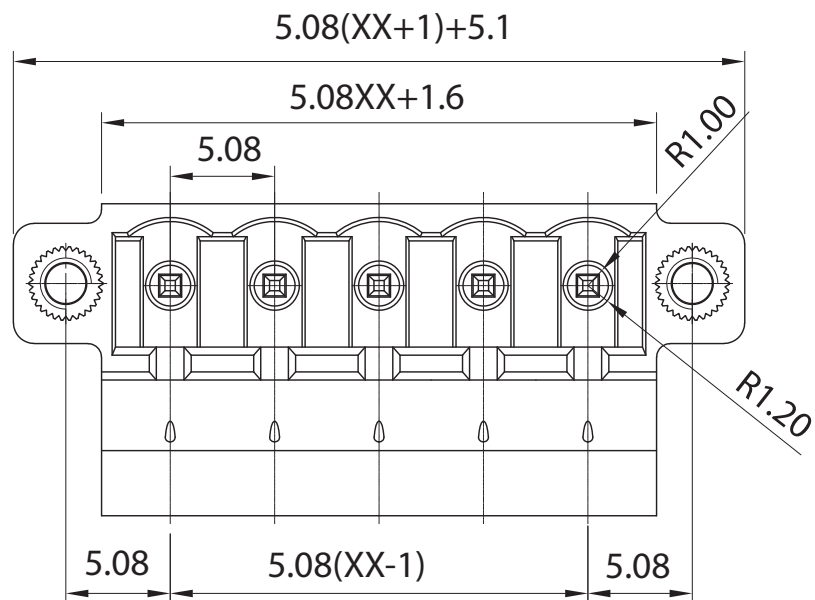

15A-300V
not approved

Electrical

Rated voltage 450 V
Rated current 20 A
Contact resistance 20 Ω
Insulation resistance 500 M Ω /DC500V
Withstanding voltage AC1600V/1 min
Wire range 2,5mm² 28÷12 AWG

Torque 0,5 Nm(4.5Lb-in)
Temp. Range -40°C + 105°C
Stripping length 7 mm
Max sold. time

Dimensions

Pitch 5.08 mm
Poles ---

Material

Housing PA66 UL94V0
Pin ---
Cage Copper Alloy, Ni plated
Screws M3; Steel Zn plated
Side Block ---
Nut screw ---
Clamp ---

General description of ordering code

Series	n. Poles	Pitch	Version	Color	Custom
CRS	2÷24	-5.08	-G		

Version Date

2020/01 21/12/2020



euro-block



UNITS: mm

SHEET SIZE: ISO A4

SCALE: 2:1

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

CRS-5.08-G