

Approvals



15A 300V
not approved

Electrical

Rated voltage 450V
 Rated current 20A
 Contact resistance 20mΩ
 Insulation resistance 500MΩ/DC500V
 Withstanding voltage AC2000V/ 1min
 Wire range

Torque
 Temp. Range -40°C + 105°C
 Stripping length
 Max sold. time +250°C for 5 sec

Dimensions

Pitch 5 mm
 Poles 2÷24

Material


Housing PA66 UL94V0
 Pin Copper Alloy, tin plated
 Cage
 Screws
 Side Block
 Nut screw
 Clamp

General description of ordering code




| Series | n. Poles | Pitch | Version | Color | Custom |
|--------|----------|-------|---------|-------|--------|
| CMP1 | 02÷24 | -5 | -VP | | -S |

Version Date

01/17 27/10/17

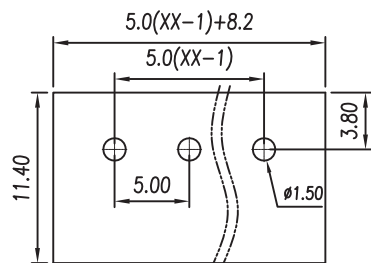

P.C.B. LAYOUT

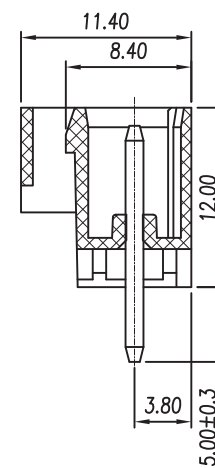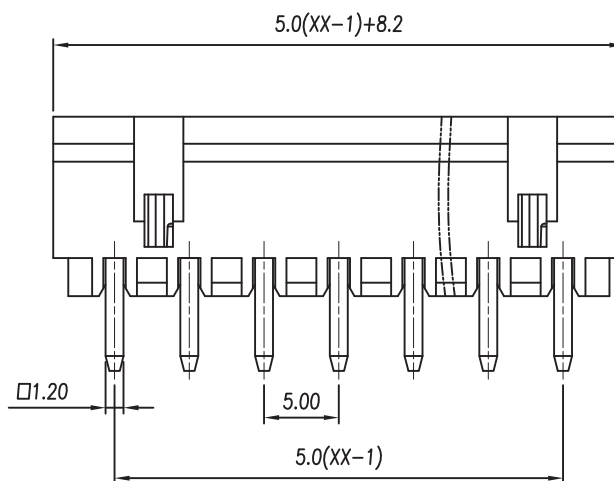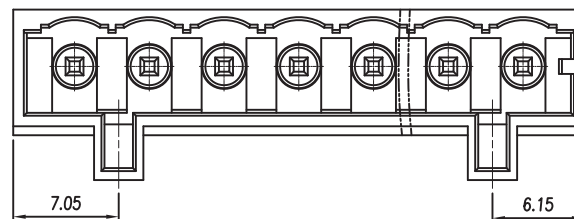

euro-block



UNITS: mm

SHEET SIZE: ISO A4

SCALE: 10:1

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50


> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



CMP1-5-VP-S